


附逆止閥中實迴轉油壓缸

ROTATING HYDRAULIC CYLINDER WITH SAFETY DEVICE



- 短型，高速，輕量型迴轉油壓缸。
- 內建逆止閥自鎖機構及壓力洩壓閥。
- 安裝時可由後端鎖固之。
- For short form, light weight and high speed rotary cylinder.
- Built-in safety check valves and pressure relief valves.
- Can screw it from the rear end of the cylinder when mounting.
- 洩油孔配管務必單獨接回油壓槽，以避免產生背壓。
- The drain port should be independently connected to oil tank to avoid back pressure.

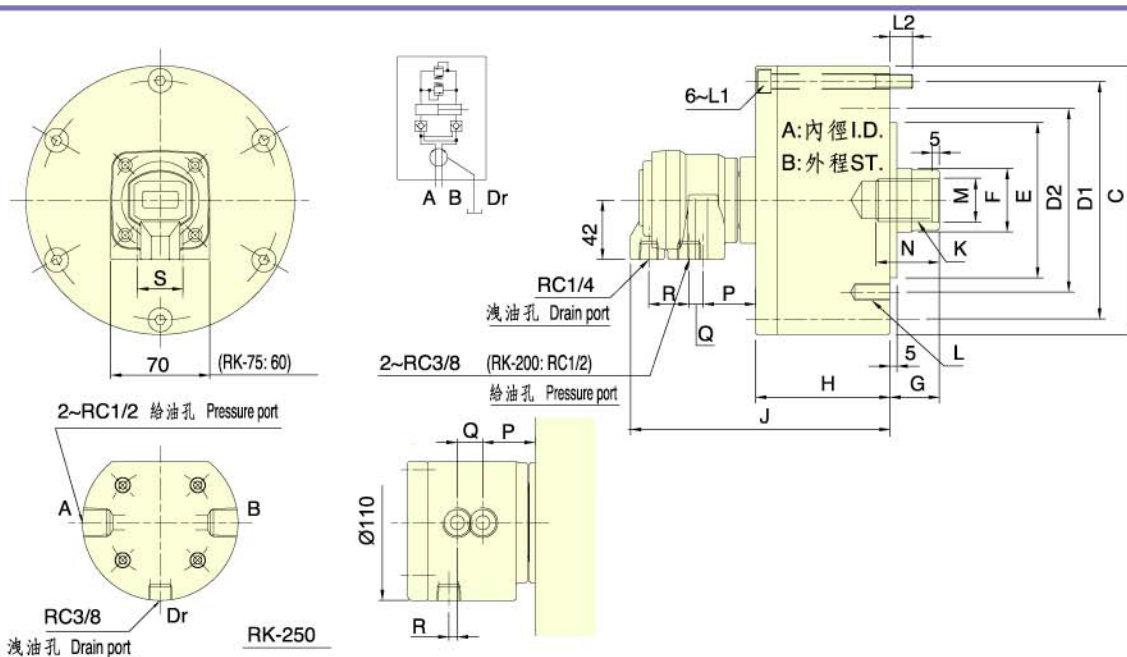

保留規格修改的權利
Subject to technical changes.

規格 Spec.	活 塞 面 積 Eff. piston area cm ²						行 程 mm		最 高 迴 轉 數 min ⁻¹ (r.p.m)		最 高 使 用 壓 力 MPa		I kg·m ²		重 量 kg	
型號 Model	押 側 Extend			拉 側 Retract			Piston stroke		Max. speed		Max. pressure (kgf/cm ²)		Moment of inertia		Weight	
RK-75	44.2			37.1			15		6000		4.0 (40)		0.01		2.9	
RK-100	78.5			71.5			20						0.03		4.4	
RK-125	122.7			113.1			25		5500				0.05		6.9	
RK-150	176.7			160.8			30						0.09		9.5	
RK-200	314.1			290.4			35						0.28		15.4	
RK-250	469.1			436.0			60		2000		5.0 (50)		0.40		45.2	

寸 法 Size	A	B	C	D1	D2	E	F	G		H	J	K	L	L1	L2	M	N	P	Q	R	S		
型號 Model						h7		max.	min.							H8							
RK-75	75	15	107		90	65			30	57	148	M20x2.5	6~M8x16	M8x60	12	21	35	41.5	10	27.5	26		
RK-100	100	20	132	115	100	80	30	45		72	163		6~M10x20	M8x75				39.5					
RK-125	125	25	160	140	130	110	35	50	25	82	172	M24x3.0	6~M12x20	M8x85	25	45	38.5					28.5	32
RK-150	150	30	190	170		45	55			95	184	M30x3.5	12~M12x24	M10x100			16	32					
RK-200	200	35	245	220	145	120	55	70	35	115	201	M36x4.0	12~M16x30	M10x125	21	38	60	38	6		28		
RK-250	245	60	307	275	220	160	65	85	25	165	255	M42x3.0	12~M20x35	M16x175	28	45	65	33	18	6	-		