


行程控制型迴轉油壓缸



ROTATING HYDRAULIC CYLINDER WITH STROKE CONTROL



- 短型，高速，行程控制型迴轉油壓缸。
- 感應式近接開關，行程調整容易，可確認油壓缸正確作動。
- 安裝時可由後端鎖固之。
- For short form, high speed and stroke control.
- To ensure safe power chuck operations by conforming movement of the piston in the cylinder.
- Can screw it from the rear end of the cylinder when mounting.
- 洩油孔配管務必單獨接回油壓槽，以避免產生背壓。
- The drain port should be independently connected to oil tank to avoid back pressure.

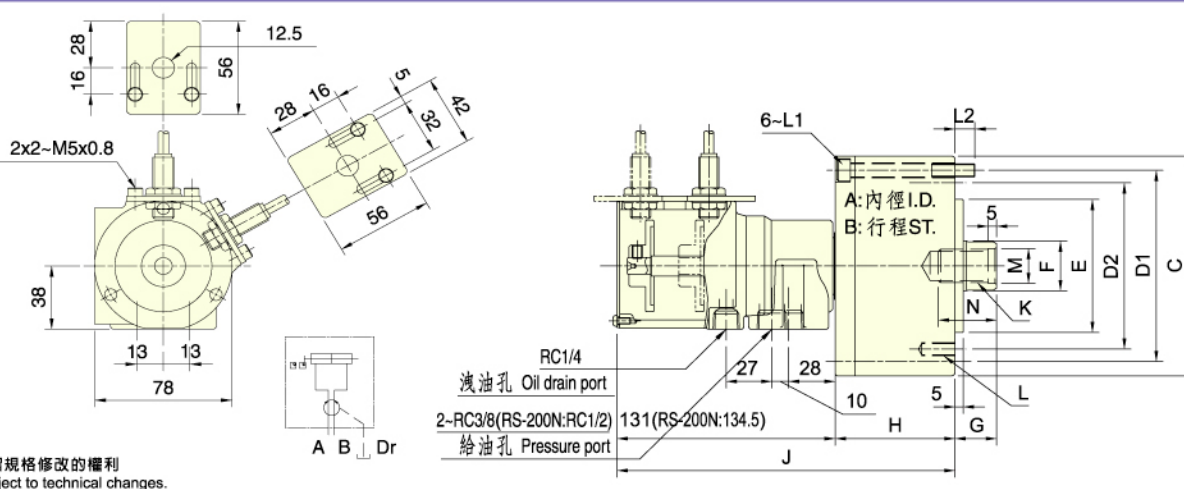

保留規格修改的權利
Subject to technical changes.

近接開關型式：

Proximity sensor : Model TLX-12N02E1-C(KFPS) DC 12~24V 200mA NPN

規格 Spec.	活塞面積 Eff. piston area cm ²		行程 mm	最高迴轉數min ⁻¹ (r.p.m)	最高使用壓力 MPa	I kg·m ²	重量 kg
型號 Model	押側 Extend	拉側 Retract	Piston stroke	Max. speed	Max. pressure (kgf/cm ²)	Moment of inertia	Weight
RS-6520N	32.0	28.3	20	6000	4.0 (40)	0.01	3.2
RS-6530N			30				3.3
RS-75N	43.0	37.1	15				0.013
RS-7530N			30				
RS-100N	77.4	71.5	20			5500	
RS-125N	121.6	113.1	25	0.05			7.3
RS-150N	175.6	160.8	30	0.16			10.6
RS-200N	313.0	290.4	35	0.29			15.9

寸法 Size 型號 Model	A	B	C	D1	D2	E h7	F	G		H	J	K	L	L1	L2	M H8	N								
								max.	min.																
RS-6520N	65	20	97	80		60	25	45	25	62	193	M16x2.0	6~M8x16	M6x70	14.5	17	30								
RS-6530N		30							15		203			M6x80											
RS-75N	75	15	107	90		65	30		30	57	188	M20x2.5		6~M10x20	M8x60	12	21	35							
RS-7530N		30							15	72	203				M8x75										
RS-100N	100	20	132	115	100	80	25	82	213	M24x3.0	6~M12x20	M8x85	25		45										
RS-125N	125	25	160	140	130	110													35	50	95	226	M30x3.5	12~M12x24	M10x100
RS-150N	150	30	190	170	145	120								55		75	35	115	249.5	M36x4.0	12~M16x30	M10x125	21	38	60
RS-200N	200	35	245	220		145								120		55	75	35	115	249.5	M36x4.0	12~M16x30	M10x125	21	38