


附逆止閥注水型迴轉油壓缸

ROTATING HYDRAULIC CYLINDER WITH COOLANT CONNECTION AND SAFETY DEVICE



- 高速，注水型迴轉油壓缸。可經由後端迴轉繼手供給切削水。
- 內建逆止閥自鎖機構及壓力洩壓閥。
- To allow coolant to be feed from the rear end of the distributor through the rotating union.
- Built-in safety check valves and pressure relief valves.
- 洩油孔配管務必單獨接回油壓槽，以避免產生背壓。
- The drain port should be independently connected to oil tank to avoid back pressure.

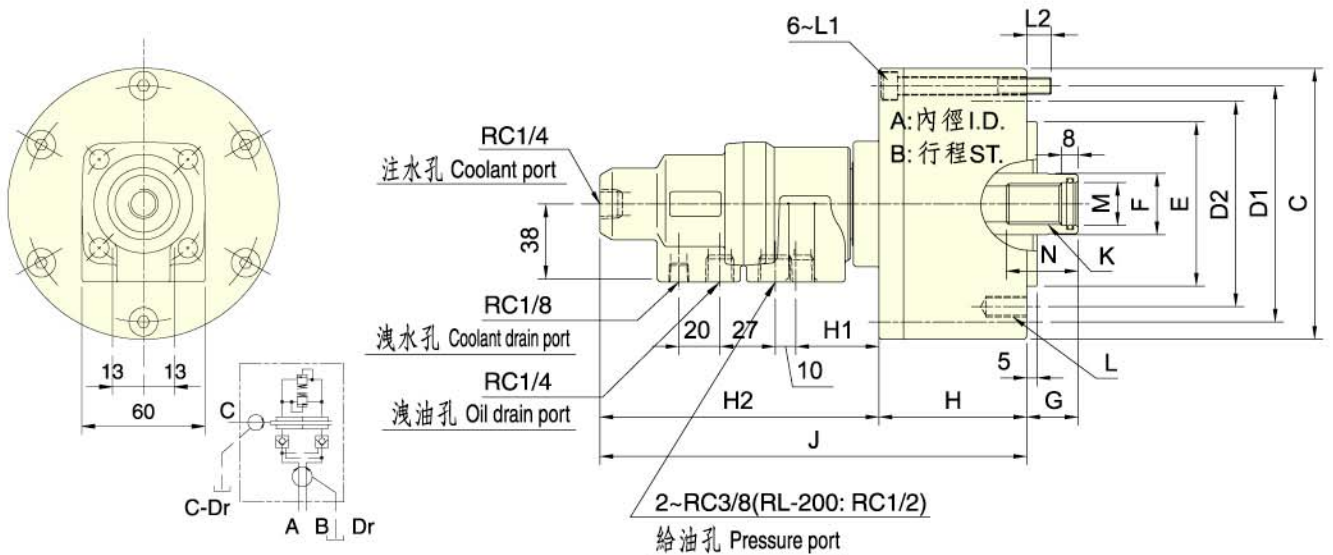

保留規格修改的權利
Subject to technical changes.

規格 Spec. 型號 Model	活塞面積 Eff. piston area (cm) ² 伸側 Extend 拉側 Retract	行程 mm Piston stroke	最高迴轉數 min ⁻¹ (r.p.m) Max. speed	最高使用壓力 MPa Max. pressure (kgf/cm ²)	注水部最高使用壓力 MPa Coolant connection max. pressure (kgf/cm ²)	I kg·m ² Moment of inertia	重量 kg Weight	
RL-75	42.6	37.1	15	4.0 (40)	3.5 (35)	0.01	3.1	
RL-100	77.0	71.5	20			6000	0.04	4.6
RL-125	121.2	113.1	25			5500	0.06	7.1
RL-150	175.2	160.8	30			0.10	9.7	
RL-200	312.5	290.4	35			0.30	15.6	

寸法 Size 型號 Model	A	B	C	D1	D2	E h7	F	G		H	H1	H2	J	K	L	L1	L2	M H8	N
								max.	min.										
RL-75	75	15	107	90	65	30	45	30	57	42	137	194	M20x2.5	6~M8x16	M8x60	12	21	35	
RL-100	100	20	132	115	100	80	50	25	72	41	136	209		6~M10x20	M8x75				
RL-125	125	25	160	140	130	110	55	25	82	39	134	218	M24x3.0	6~M12x20	M8x85	16	32	45	
RL-150	150	30	190	170	130	110	55	25	95	39	134	230	M30x3.5	12~M12x24	M10x100				
RL-200	200	35	245	220	145	120	70	35	115	36	132	248	M36x4.0	12~M16x30	M10x125	21	38	60	